




Trionic Corp Dock Box Assembly Instructions (All Models)

Tools Needed:

- 7/16" Wrench
- Philips Head Screwdriver

Step 1:

Attach the Male half of the Hinge to the Hinge Bracket using 2 bolts, 2 flat washers and 2 lock washers. Repeat this step with the remaining Male Hinge and Hinge Bracket. See diagram below.

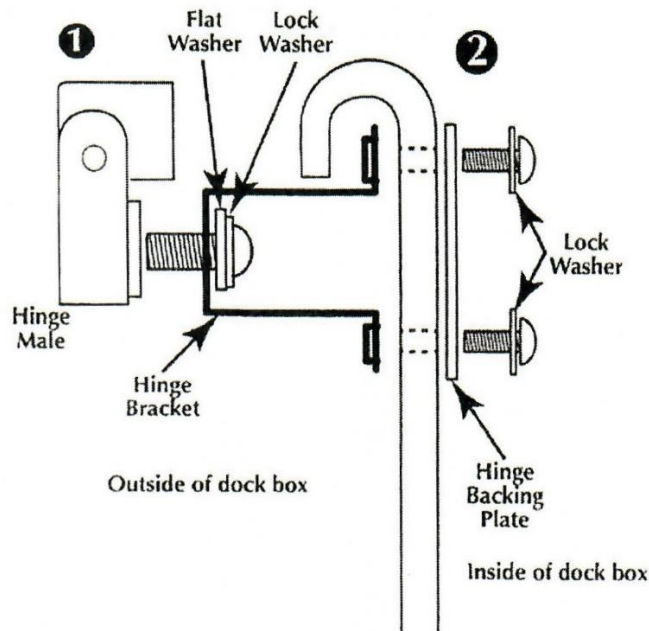


Step 2:

Attach the Hinge Backing Plate on the inside of the Dock Box to the Hinge Bracket using 2 bolts and 2 flat washers through the predrilled holes on the back of the Dock Box. Before securing, locate the Hinges so that the rounded edge of the Male Hinge is facing upward with the Male Hinge pegs pointing toward the middle of the back wall of the box. Repeat this step with the remaining Hinge Plate and Hinge Bracket. See diagram above.


Step 3:

Attach only 1 Female Hinge to the outside of the Dock Box Lid using 2 bolts and 2 flat washers. Slide the Lid onto the Dock Box base, aligning the Male and Female Hinge Components. Align the second Female Hinge to the remaining Male Hinge and attach the second Female Hinge to the Dock Box Lid using 2 bolts and 2 flat washers, and 2 lock washers. See diagram below.

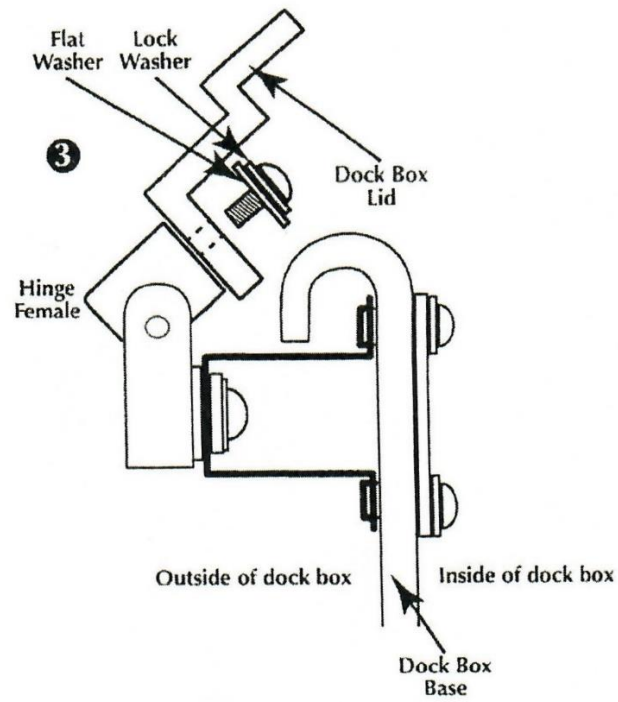

Step 4:

Attach one end of each Lid Retention Cable to the inside of the Dock Box and the other end of each Lid Retention Cable to the inside of the Lid using the predrilled holes and a 1 bolt, 1 nut, 2 flat washers, and 1 lock washer at each hole. See diagram below.

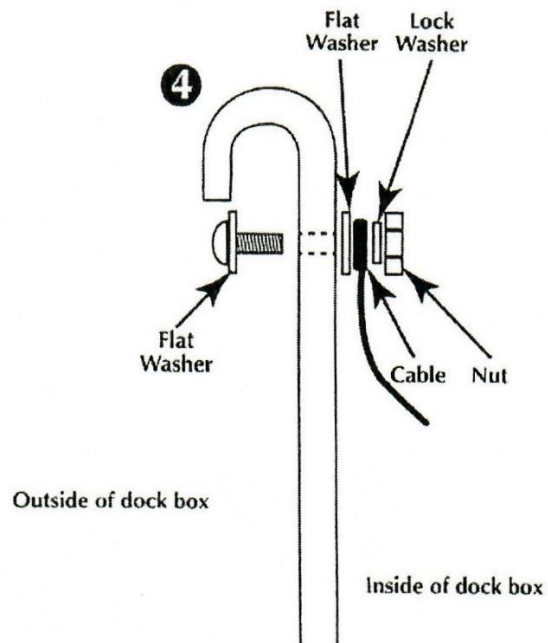



Step 5:

To mount the Dock Box to the dock, you can drill holes through the bottom of the Dock Box at any location needed. We recommend that you use large diameter washers on the inside of the box with each anchor bolt or screw. This hardware is not provided with the Dock Box and should be purchased separately to meet your specific needs.

Step 6 (Optional):

Removed the drain plug in the bottom of the Dock Box to allow water to drain through the bottom of the Dock Box during use.